

SL75



SL75
MACHIEL HOPMAN, CONSORTARCHITECTS
LELY, MAASSLUIS (NL)





SL75 POLY CONTINUOUS ALU




SL75 RGB LED / M

Cross-section / mounting

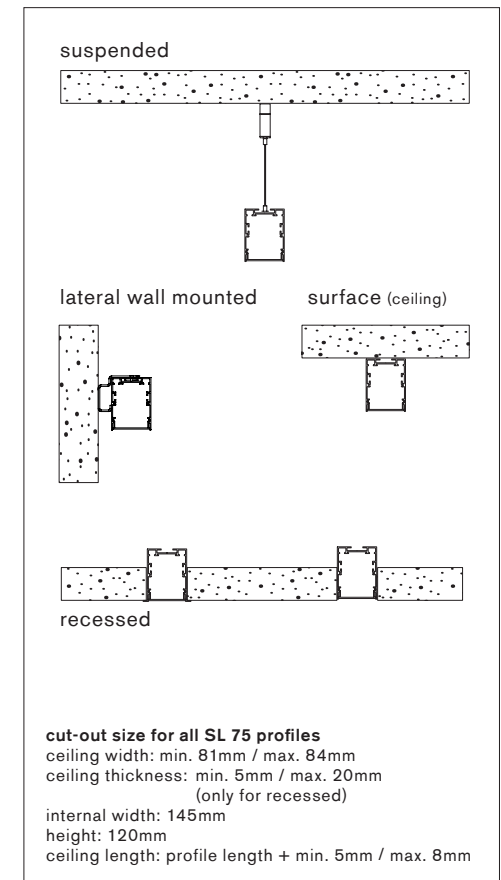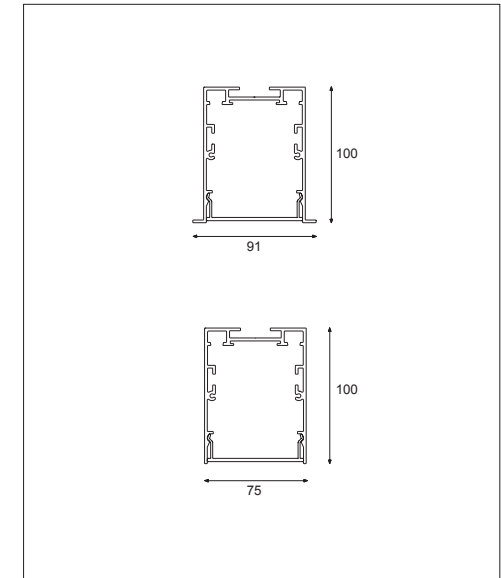


SL75 Ready made


TL5 continuous poly down GI (length 1192 mm)



surface mounted		non-dim	length*
alu	93350010	1192	
white struc	93350012	1192	



suspended		non-dim	length*
alu	93350020	1192	
white struc	93350022	1192	




! incl. power feed kit 2m (transparent cable) & suspension set

lampinfo			
1x T16 G5	28/54W	54W	down


eco 3.79 230V 960°C

SL75 Ready made

Fortimo 4x LED Line 3850lm/m GI (length 1148 mm)



surface mounted		3000K non-dim	3000K Pushdim/Dali	length*
alu	93350410	98350410	1148	
white struc	93350412	98350412	1148	



suspended		3000K non-dim	3000K Pushdim/Dali	length*
alu	93350420	98350420	1148	
white struc	93350422	98350422	1148	




! incl. power feed kit 2m (transparent cable) & suspension set

eco 4.08 230V 960°C


TL5 continuous poly down GI (length 1968 mm)



surface mounted		non-dim	length*
alu	93352010	1968	
white struc	93352012	1968	



suspended		non-dim	length*
alu	93352020	1968	
white struc	93352022	1968	



! incl. power feed kit 2m (transparent cable) & suspension set

lampinfo			
1x T16 G5	28/54W	54W	down
1x T16 G5	21/39W	39W	down

eco 5.18 230V 960°C

Fortimo 7x LED Line 3850lm/m GI (length 1988 mm)



surface mounted		3000K non-dim	3000K Pushdim/Dali	length*
alu	93352710	98352710	1988	
white struc	93352712	98352712	1988	



suspended		3000K non-dim	3000K Pushdim/Dali	length*
alu	93352720	98352720	1988	
white struc	93352722	98352721	1988	





































! incl. power feed kit 2m (transparent cable) & suspension set

eco 5.52 230V 960°C

* length including endplates

READY MADE PROFILES
SHORTER LEADTIME. COST SAVING UP TO 20%*
*compared to linear custom made profiles

SL75 Components


<p>Profile Variation</p>	<p>profile alu, poly/m</p>  <p>93350005 93350905 93350005 + 93350009</p>	<p>flange profile alu, poly/m</p>  <p>93350002 93350902 93350002 + 93350008</p>	<p>profile alu, poly in PMMA/m</p>  <p>93350006 93350906 93350006 + 93350009</p>	<p>suspension 4m</p>  <p>max 4000</p> <p>93350150 93350950 93350150 + 93000358</p>	<p>suspension bracket</p>  <p>93350999</p>	<p>suspension bracket asym for LED-strip 5m</p>  <p>93350994</p>	<p>suspension bracket trimless</p>  <p>93350997</p>
<p>flange profile alu, poly in PMMA/m</p>  <p>93350003 93350903 93350003 + 93350008</p>	<p>flange profile alu, for bap continuous</p>  <p>93350004 93350004 + 93350009</p>	<p>profile alu, for bap continuous</p>  <p>93350007 93350007 + 93350009</p>	<p>Connections ></p>	<p>surface fixation hole for LED</p>  <p>93351162</p>	<p>surface fixation hole</p>  <p>slot 40x10</p> <p>93000999</p>	<p>lateral wall bracket</p>  <p>100,5 25,5</p> <p>93350161 93350961 93350161 + 93350162</p>	<p>Electrical supply ></p>
<p>connection 180°</p>  <p>93350050</p>	<p>connection 135°</p>  <p>93350050</p>	<p>connection 90°</p>  <p>93350060</p>	<p>Endplates ></p>	<p>connection box</p>  <p>ø 75 20</p> <p>93000151 93003251 93000951 93000151 + 93000153</p>	<p>flexible</p>  <p>ø 20</p> <p>1m 93000152 /m 93000252</p>	<p>power feed tube 1m</p>  <p>ø 20</p> <p>93000156 93003156 93000856 93000156 + 93000157</p>	<p>power feed tube/m</p>  <p>ø 20</p> <p>93000256 93003256 93000956 93000256 + 93000157</p>
<p>endplate incl. inner flange</p>  <p>93350181 93350981 93350181 + 93350188</p>	<p>endplate flange incl. inner flange</p>  <p>93350182 93350982 93350182 + 93350188</p>	<p>endplate excl. inner flange</p>  <p>93350183 93350983 93350183 + 93350188</p>	<p>endplate flange excl. inner flange</p>  <p>93350184 93350984 93350184 + 93350188</p>	<p>power feed kit 2m (transparent cable) 3x 1.5mm² alu</p>  <p>ø 70 147</p> <p>93002003 93003203 93002903 93002003 + 93002053</p>	<p>power feed kit 2m (transparent cable) 5x 1.5mm² alu</p>  <p>ø 70 147</p> <p>93002005 93003205 93002905 93002005 + 93002053</p>	<p>connection box for transparent cable 3x 1.5mm² alu</p>  <p>ø 70 47</p> <p>93002151 93003151 93002951 93002151 + 93002053</p>	<p>connection box for transparent cable 5x 1.5mm² alu</p>  <p>ø 70 47</p> <p>93002251 93003251 93003951 93002251 + 93002053</p>
<p>endplate flange, for bap continuous</p>  <p>93350186 93350186 + 93350188</p>	<p>endplate, for bap continuous</p>  <p>93350185 93350185 + 93350188</p>	<p>Fixation/ Mounting ></p>	<p>hinged suspension 4m</p>  <p>93350147 93350947 93350147 + 93000149</p>	<p>transparent cable/m 3x 1.5mm²</p>  <p>93002152</p>	<p>transparent cable/m 5x 1.5mm²</p>  <p>93002252</p>	<p>hole for power supply</p>  <p>ø 14.5</p> <p>93000100 new</p>	

SL75 Linear custom made modules

LED

Fortimo LED Line 3850lm/m GI

	3000K non-dim	3000K 1-10V	3000K Pushdim/Dali	mod
2x	93354002	96354002	98354002	562
3x	93354003	96354003	98354003	843
4x	93354004	96354004	98354004	1124
5x	93354005	96354005	98354005	1405
6x	93354006	96354006	98354006	1686
7x	93354007	96354007	98354007	1967
8x	93354008	96354008	98354008	2248




! gear included
! 1 strip = 8.1W
! 4000K on request

! in combination with standard poly: 43lm/W
! in combination with poly PMMA: 59lm/W

eco

LED-strip 1000lm/m 24V GE

	3000K
not mounted roll 5m	93000500
mounted/m	93000501
24V connection	93350502




! order LED-strip driver separately - see p.55
! 5m roll - 24V DC - 70W/roll - 14W/m - 60LED/m - to cut every 10cm

eco

LED-strip 700lm/m 24V GE

	3000K
not mounted roll 5m	93000530
mounted/m	93000531
24V connection	93351532




! order LED-strip driver separately - see p.55
! 5m roll - 24V DC - 42.5W/roll - 8.5W/m - 48LED/m - to cut every 12.4cm

new eco

LED-strip RGB 24V GE (on request)

	RGB
not mounted roll 5m	93000610
mounted/m	93000611
24V connection	93351612



! order LED-strip driver separately - see p.55
! 5m roll - 24V DC - 42.5W/roll - 8.5W/m - 36LED/m - to cut every 16.5cm

eco

Gear for LED-strip

Remote gear for LED-strip

		non-dim	1-10V	Pushdim	Dali	DMX	L	B	H
700lm/m 1000lm/m	24V 20W	93009510	/	/	/	/	150	37	25
	24V 60W	93009530	/	/	/	/	241	43	30
	24V 100W	93009540	/	/	/	/	241	43	30
	24V 20W	/	96009510	/	/	/	146	55	19
	24V 80W	/	96009530	/	/	/	250	50	34
	24V 75W	/	/	/	98009530	/	/	/	/
	24V 100W	/	96009540	/	/	/	250	60	39
RGB	24V 60W + DMX controller	/	/	/	/	93900000	530	50	40
	DMX controller	/	/	/	/	93900005	120	50	25
	to be touched RGB DMX control system	/	/	/	/	11690109	/	/	/
	to be touched power supply	/	/	/	/	11690200	/	/	/

! see p.116 to determine max. distance between strip and driver
! 1 separate driver per 5m LED-strip

LED



SL75
D+Z ARCHITECTEN+PROJECTMANAGERS
LEVEL 23, LEEUWARDEN (NL)

SL75 Linear custom made modules

FLUORESCENT

TL5 HE continuous line down




	non-dim	1-10V	DSI	Pushdim/Dali	emergency pack 3h	mod
1x 14W	93355114	96355114	97355114	98355114	-	575
1x 21W	93355121	96355121	97355121	98355121	-	875
1x 28W	93355128	96355128	97355128	98355128	93351012	1175
1x 35W	93355135	96355135	97355135	98355135	93351012	1475
2x 14W	93355214	96355214	97355214	98355214	-	1040
2x 21W	93355221	96355221	97355221	98355221	93351013	1640
2x 28W	93355228	96355228	97355228	98355228	93351012	2240
2x 35W	93355235	96355235	97355235	98355235	93351012	2840

! check p.98 for TL5 continuous line calculator



T16 G5

TL5 HO continuous line down




	non-dim	1-10V	DSI	Pushdim/Dali	emergency pack 3h	mod
1x 24W	93355124	96355124	97355124	98355124	-	575
1x 39W	93355139	96355139	97355139	98355139	-	875
1x 49W	93355149	96355149	97355149	98355149	93351012	1475
1x 54W	93355154	96355154	97355154	98355154	93351012	1175
1x 80W	93355180	96355180	97355180	98355180	-	1475
2x 24W	93355224	96355224	97355224	98355224	-	1040
2x 39W	93355239	96355239	97355239	98355239	93351012	1640
2x 49W	93355249	96355249	97355249	98355249	93351012	2840
2x 54W	93355254	96355254	97355254	98355254	93351012	2240
2x 80W	93355280	96355280	97355280	98355280	-	2840

! check p.98 for TL5 continuous line calculator



T16 G5

TL5 HE bap continuous




	non-dim	1-10V	DSI	Pushdim/Dali	emergency pack 3h	mod
1x 14W	93357114	96357114	97357114	98357114	-	575
1x 21W	93357121	96357121	97357121	98357121	-	875
1x 28W	93357128	96357128	97357128	98357128	93351015	1175
1x 35W	93357135	96357135	97357135	98357135	93351015	1475

! efficiency up to 95%



T16 G5

TL5 HO bap continuous




	non-dim	1-10V	DSI	Pushdim/Dali	emergency pack 3h	mod
1x 24W	93357124	96357124	97357124	98357124	-	575
1x 39W	93357139	96357139	97357139	98357139	-	875
1x 49W	93357149	96357149	97357149	98357149	93351015	1475
1x 54W	93357154	96357154	97357154	98357154	93351015	1175
1x 80W	93357180	96357180	97357180	98357180	-	1475

! efficiency up to 95%



T16 G5

FLUORESCENT

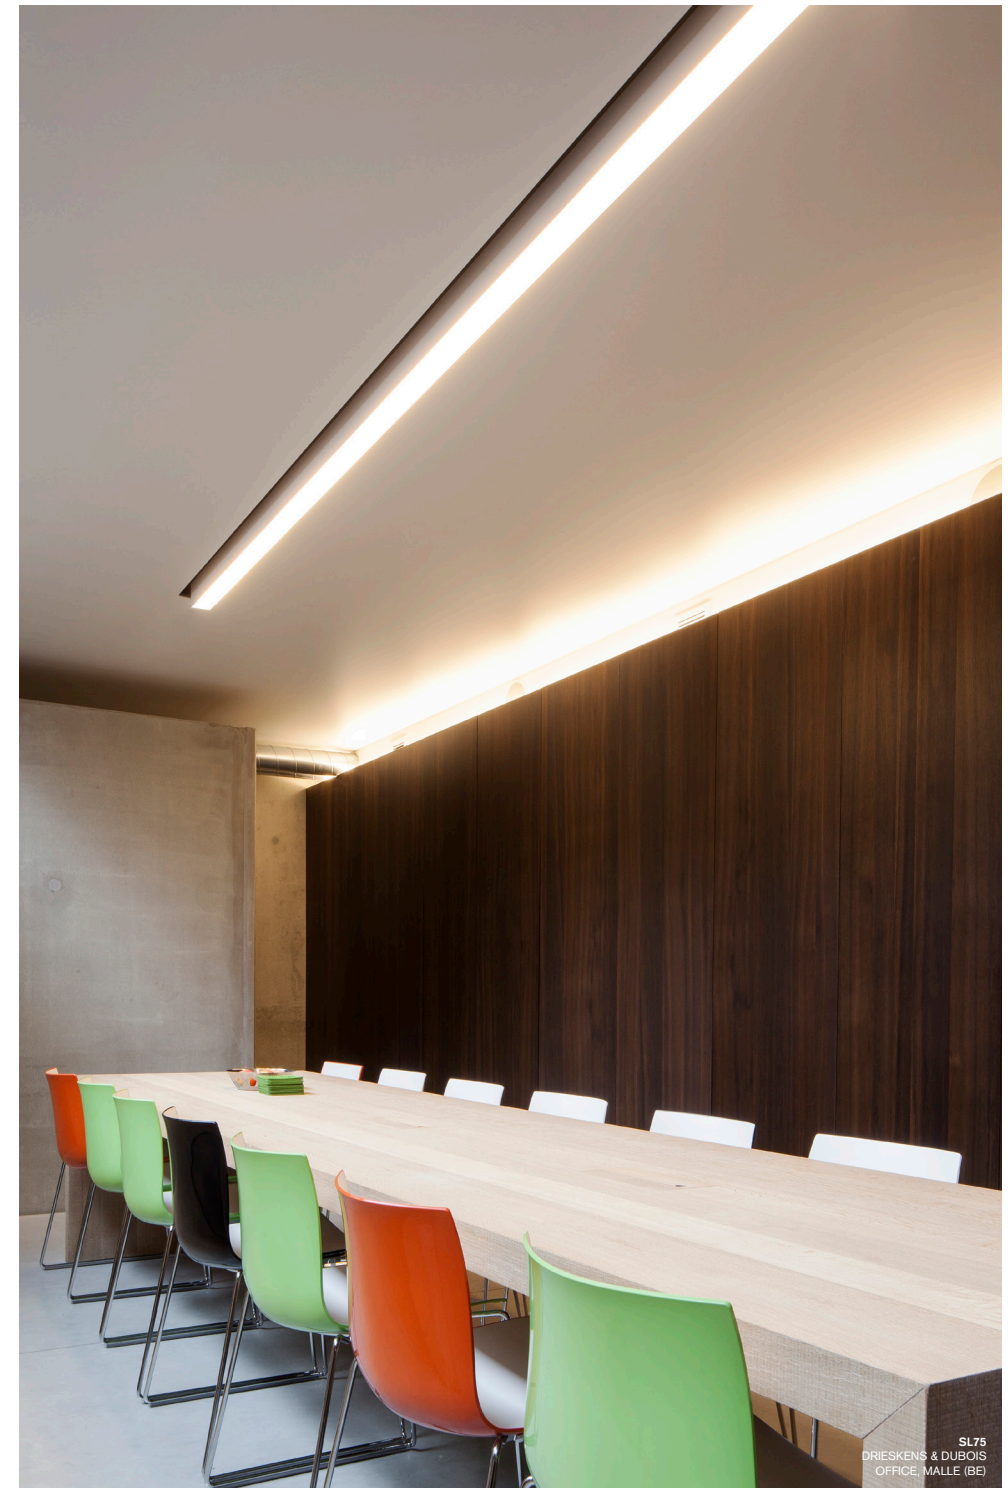

SL75
DRIESKENS & DUBOIS
OFFICE, MALLE (BE)

SL75 Supplements

ral	+
article ral supplements	article supplements
93358050 ral setup charge (except white struc and black struc)	93503000 suppl. extra circuit /m

