


CAKE 168 IP55 LED 1100LM RG

Cake is just as appealing as its name suggests and can be recessed into the ceiling or wall. Its gently sloping sides ensure a soft distribution of light. There are various sizes to choose from. Cake comes with a diffuser by default; if you want extra light, it can also be used without the diffuser. Won a Good Design Award in 2004.

Art. Nr. 11122909

SPECIFICATIONS


Lamp	1x DLM 11W
Gear / Transfo	LED gear incl.
Cut-out size	ø 160 h 180
Weight	1.6kg
Min. Distance	0.1 m
Power supply	230V
IP	IP55/IP44
Glow Wire Test	960°
Source lifetime	50000 hrs
CRI	80
Lumen	539 Lm
Efficacy	37 Lm/W
UGR	23
Remark	! can be used without diffuser (IP44)



This label is available in other languages:
<http://supermodular.com/assets/TYPE2.pdf>

	WARM WHITE 3000K / CRI 80+	NEUTRAL WHITE 4000K / CRI 80+
	WIDE FLOOD 90°	WIDE FLOOD 90°
white struc	11122909	11123109



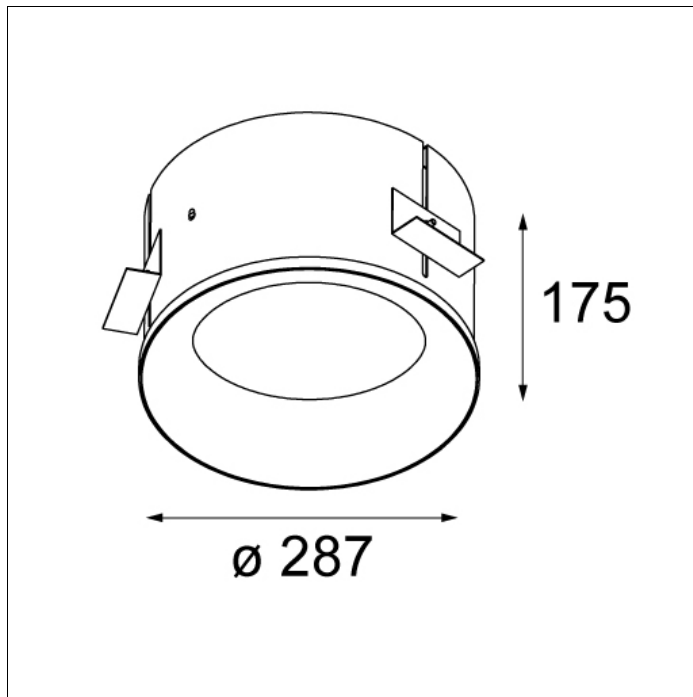


CAKE 287 TC-D PUSHDIM GI

Cake is just as appealing as its name suggests and can be recessed into the ceiling or wall. Its gently sloping sides ensure a soft distribution of light. There are various sizes to choose from. Cake comes with a diffuser by default; if you want extra light, it can also be used without the diffuser. Won a Good Design Award in 2004.

Art. Nr. 11127109


SPECIFICATIONS


Lamp	2x TC-DEL G24q-3 26W
Gear / Transfo	gear incl., electronic
Cut-out size	ø 289 h 205
Weight	1.7kg
Min. Distance	0.5 m
Power supply	230V
IP	IP20
Glow Wire Test	960°
CRI	82
Lumen	844 Lm
Efficacy	15 Lm/W
UGR	21

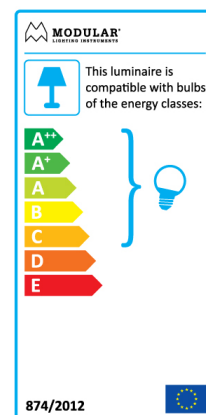

white struc

11127109



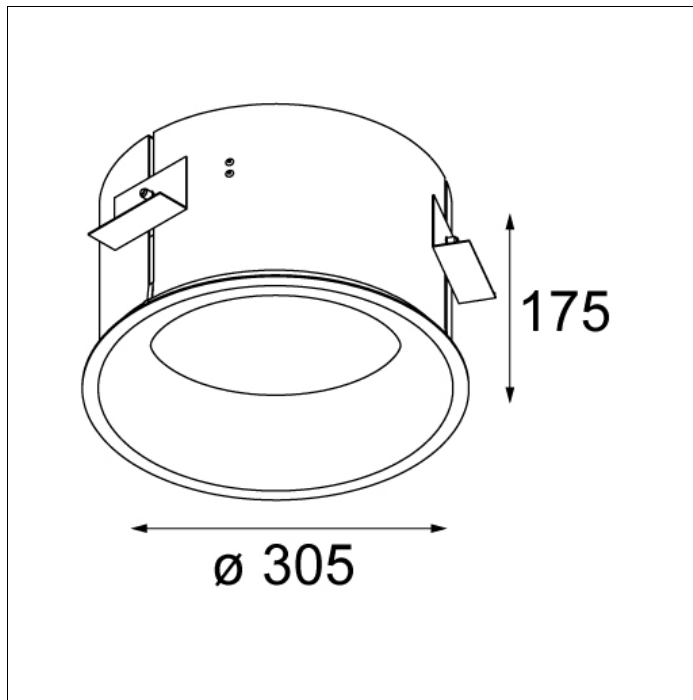


CAKE FLANGE 305 TC-D PUSHDIM GI

Cake is just as appealing as its name suggests and can be recessed into the ceiling or wall. Its gently sloping sides ensure a soft distribution of light. There are various sizes to choose from. Cake comes with a diffuser by default; if you want extra light, it can also be used without the diffuser. Won a Good Design Award in 2004.

Art. Nr. 11127409

SPECIFICATIONS

Lamp	2x TC-DEL G24q-3 26W
Gear / Transfo	gear incl., electronic
Cut-out size	ø 289 h 205
Weight	1.7kg
Min. Distance	0.5 m
Power supply	230V
IP	IP20
Glow Wire Test	960°
CRI	82
Lumen	844 Lm
Efficacy	15 Lm/W
UGR	21

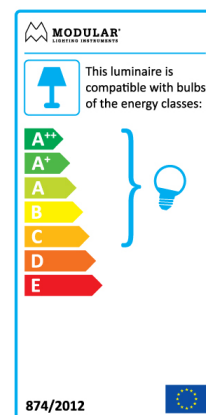

white struc

11127409

