



Lucellino Wall
INGO MAURER 1992

Glass, brass, plastic, hand-crafted goose-feather wings.

Light source


With special halogen bulb 35W, produced exclusively for Ingo Maurer GmbH, only for use in the Lucellino product family. Luminous flux: 600 lm, light efficiency: 17 lm/W, output: 35 kW/1000 Std. Mean life: 2000 h. EU energy class: approx. C. Socket E27. The bulbs are mentioned as exception in the EU regulation 244/2009.

Technical data

For 230 or 125 volts, secondary output 24 volts. With electronic transformer, continuously variable dimmer. 125 V: transformer with inline dimmer

More info

Also available without transformer (transformer necessary). Not suited for rooms with high humidity. Complete with bulb, spare bulb and white base-plate.

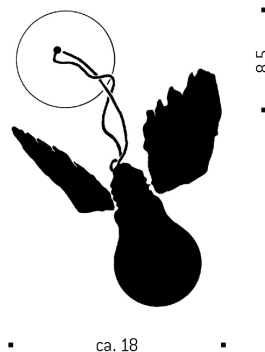

ca. 18

8,5