
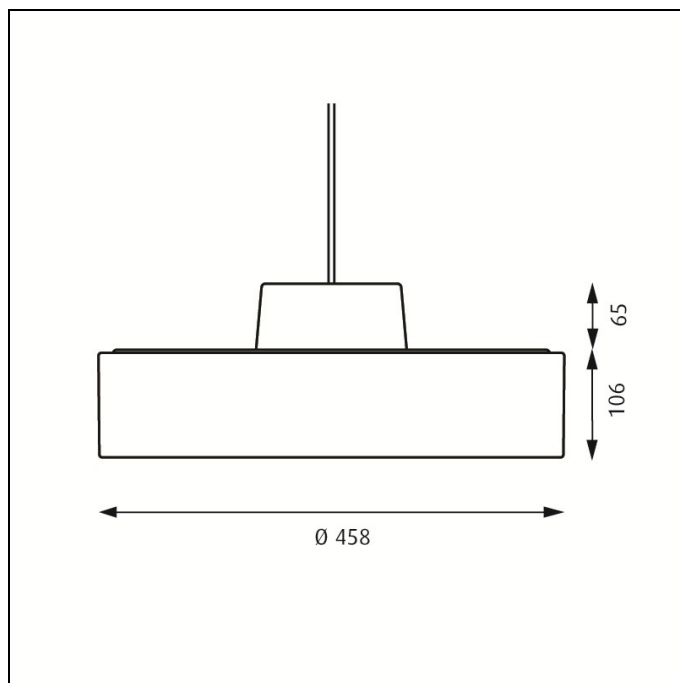


# LP Circle Suspended

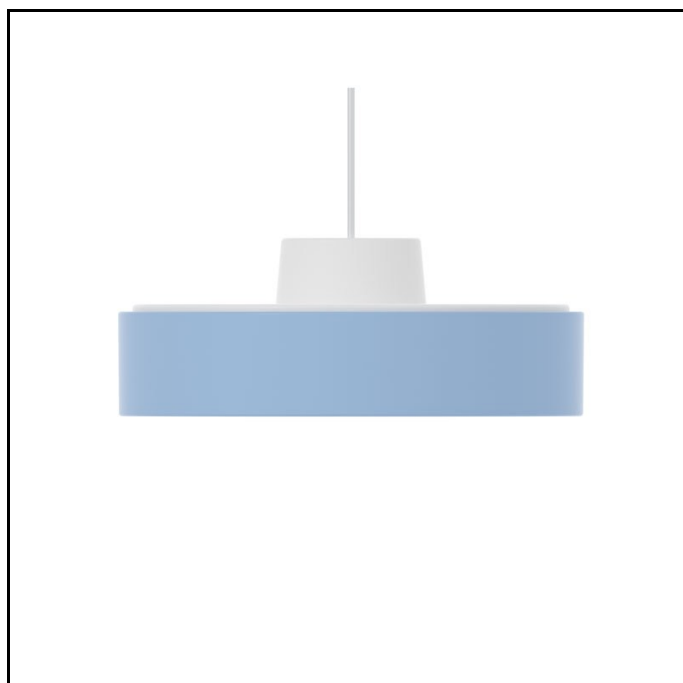

**Design** Mikkel Beedholm/KHR arkitekter

**Concept** The fixture emits diffuse light via a high-efficiency acrylic diffuser. The diffuser, which is encircled by a voluminous coloured or white ring, is hidden when viewed from low angles. Angling the inner side of the ring 5° creates a comfortable and decorative gradation of the light from the diffuser. Perforated body discreetly illuminates the other components of the fixture.

**Finish** White, Blue, Red or Black. Powder coated.

**Material** Reflector: Deep drawn aluminium. Diffuser: Acrylic, frosted.

**Mounting** Hung: Cord 5x1.5mm<sup>2</sup>, 3m.

**Weight** Max 5kg. (Ø450).

**Class** Ingress protection IP20. Electric shock protection I.

Product Code	Dimensions	Light source	Finish	Lighting control
LP-CIRC-SUSP	Ø 450	30W LED 3000K 30W LED 4000K	BLK BLUE RED WHT	DALI/SWITCH-DIM DIM 1-10V

## Specification notes

The driver is built into the fixture. All LED power measurements are measured as system power.

## Info notes

LED technology is constantly developing. The specifications given are based on existing technology. Please find updated info on products on our website [www.louispoulsen.com](http://www.louispoulsen.com). Please contact Louis Poulsen for the following versions: LP Circle Ø 450 HO: High output for projects with high ceilings or where high illumination is required. LP Circle Ø 450 HE: Improved efficiency, while standard lighting levels can still be achieved. LP Circle Ø 450 with microprismatic diffuser for UGR <19 (CIE 117). If you have special requirements concerning colour temperature, IP class, emergency lighting solutions or other modifications to the LP Circle model, please contact Louis Poulsen.