
Wohlert



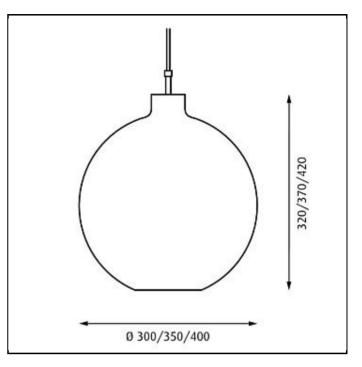

Design	Vilhelm Wohlert							
Concept	The fixture provides uniform, general and diffuse illumination. The opening at the bottom of the glass produces downwards directed light. The quality of the glass ensures that the fixture is evenly lit.							
Finish	Matt white opal glass.							
Material	Shade: Mouth-blown matt white opal glass. Pendant tube: Brushed steel.							
Mounting	Suspension type: Cable 3x0,75mm². Canopy: Yes. Cable length: 3m.							
Weight	Max. 4.5kg.							
Class	Ingress protection IP20. Electric shock protection I w. ground.							
Droduct Code	Dimensions Light source Fisch Cable tog Lighting sorted							

Pr	oduct Code	Dimensions	Light source	Finish	Cable type	Lighting control
W	р-Р	Ø 300	1x200W E27	WHT OPAL GLASS	WHT PL	DIM 1-10V
		Ø 350	1x26/32W TC-TEL G24q-3 HF-D		WHT TEX	NONE
		Ø 400	1x26/32W TC-TEL GX24q-3 HF			
			1x26W/32W/42W TC-TEL HF			
			1x26W/32W/42W TC-TEL HF-D			

Specification notes

26/32W TC-TEL only available with Ø 300. 26/32/42W TC-TEL only available with Ø 350 and Ø400. The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.

louis poulsen