

# COSMO <sub>3</sub>





<b>68520?0</b>		CO3 136 EVG	1xT8 36W	G13	230V AC	2,00	E
<b>68530?0</b>		CO3 236 EVG	2xT8 36W	G13	230V AC	2,10	F
<b>68540?0</b>		CO3 158 EVG	1xT8 58W	G13	230V AC	2,40	E
<b>68550?0</b>		CO3 258 EVG	2xT8 58W	G13	230V AC	2,50	F
<b>68560?0</b>	<b>8868000</b>	CO3 128	1xT5 28W	G5	230V AC	1,90	G
<b>68570?0</b>	<b>8869000</b>	CO3 228	2xT5 28W	G5	230V AC	1,90	H
<b>68580?0</b>		CO3 154	1xT5 54W	G5	230V AC	1,90	G
<b>6859000</b>		CO3 254	2xT5 54W	G5	230V AC	2,00	H
<b>68600?0</b>	<b>8872000</b>	CO3 135	1xT5 35W	G5	230V AC	2,30	G
<b>68610?0</b>	<b>8873000</b>	CO3 235	2xT5 35W	G5	230V AC	2,30	H
<b>68620?0</b>		CO3 180	1xT5 80W	G5	230V AC	2,30	G
<b>6863000*</b>		CO3 280	2xT5 80W	G5	230V AC	2,40	H
<b>24060?0</b>		CO3 149	1xT5 49W	G5	230V AC	2,30	G
<b>2407000</b>		CO3 249	2xT5 49W	G5	230V AC	2,40	H

EVG - stateczniki elektroniczne / electronic ballast

..... ? . 0 - BEZ ŚCIEMNIANIA NO DIMMING • 5 - SWITCH DIM A • 6 - DALI • 8 - DSI • 9 - 1-10V

\* dozwolona pozycja pracy na zwieszaku min. 0,5 m od strzechy / allowable working position pendant, min. 0,5 m from the ceiling

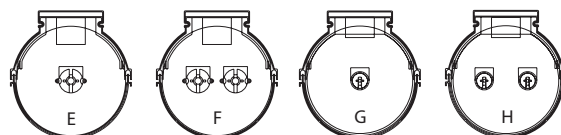

	L [mm]
T8 36W, T5 28W, T5 54W	1287
T8 58W, T5 35W, T5 49W, T5 80W	1587