

LOTIS 48 IP55 LED GE


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.



Art. Nr. 10882032

SPECIFICATIONS

Lamp	1x high power LED	
Gear / Transfo	LED gear not incl.	
Cut-out size	ø 44 h 58 (ø 46 for wood)	
Weight	0.13kg	
Min. Distance	0.1 m	
IP	IP55	
Glow Wire Test	960°	
Source lifetime	50000	
CRI	80	
Power supply	500mA	350mA
	2.76	2.72V DC
Connected load	1.4W	1W
Lumen	113lm	80lm
Efficacy	81lm/W	80lm/W
UGR	8	6

	WARM WHITE 3000K / CRI 80+
	MEDIUM 25°
black struc	10882032
white struc	10882009



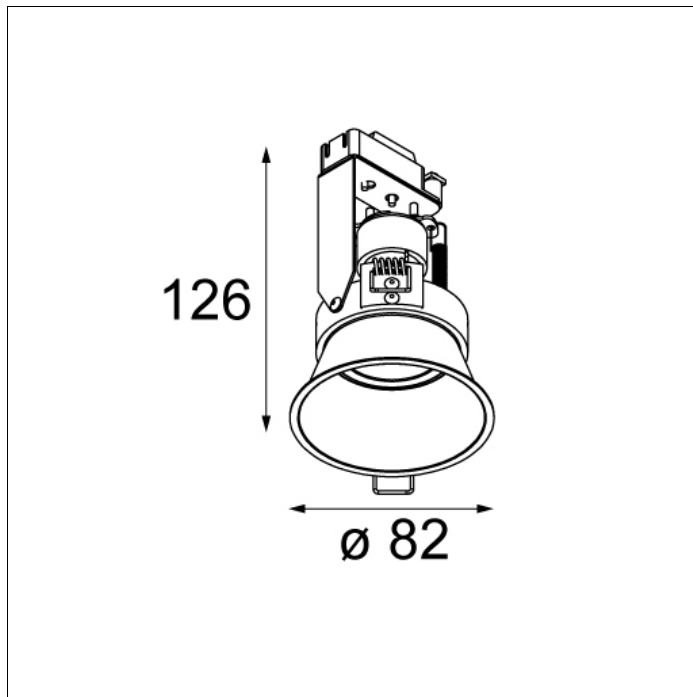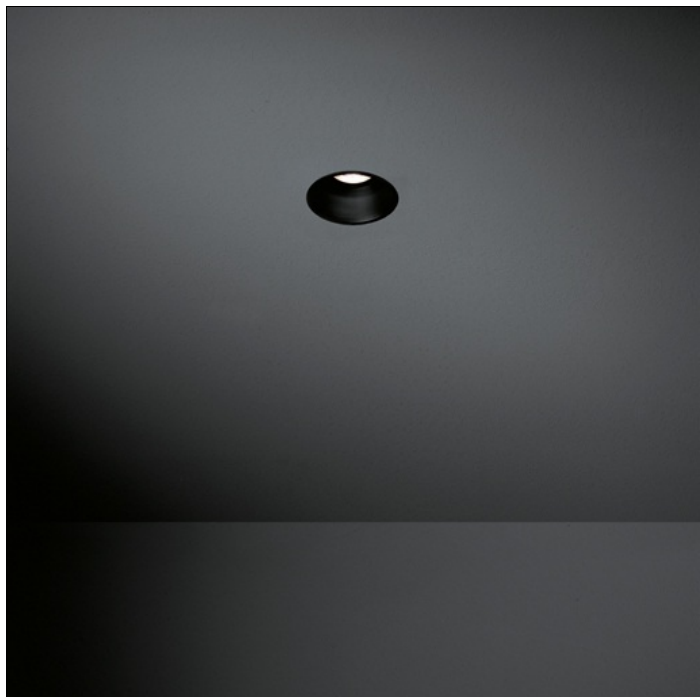

LOTIS 82 GU10


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.



Art. Nr. 10881005

SPECIFICATIONS

Lamp	1x QPAR 16 Gu10 max. 50W
Gear / Transfo	transfo/gear not required
Cut-out size	ø 76 h 115
Weight	0.148kg
Min. Distance	0.5 m
Power supply	230V
IP	IP20
Glow Wire Test	960°
CRI	100
Lumen	345 Lm
Efficacy	7 Lm/W
UGR	10

alu	10881005
black	10881002
gold	10881046
white struc	10881009

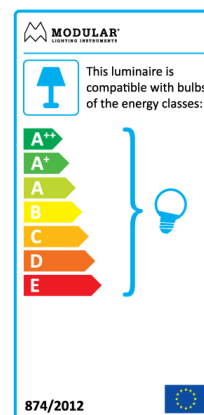

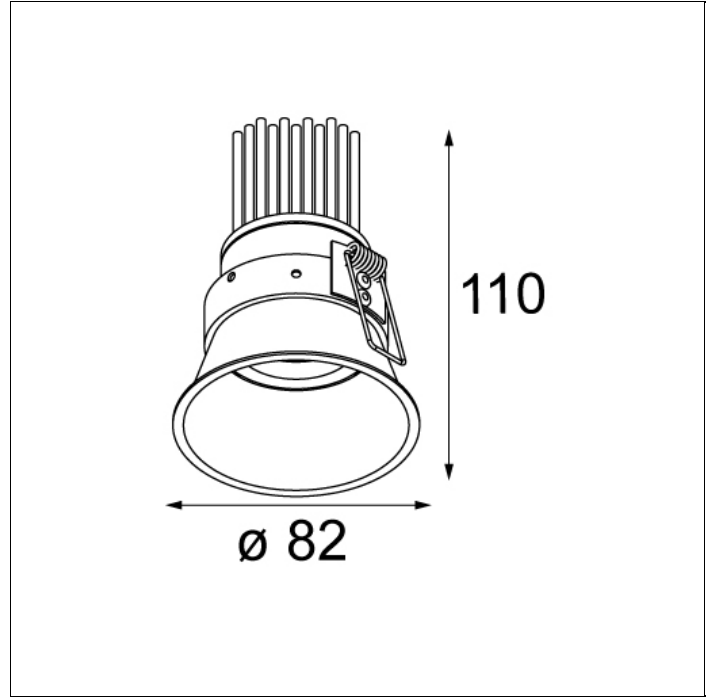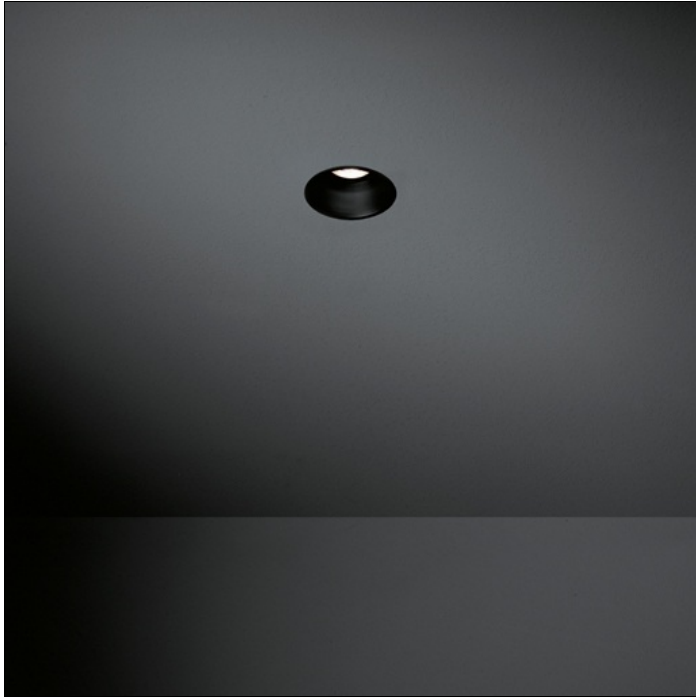

LOTIS 82 LED 1-10V/PUSHDIM RG



Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.



Art. Nr. 11450405

SPECIFICATIONS

Lamp	1x LED Array 10.5W
Gear / Transfo	LED gear incl.
Cut-out size	ø 76 h 115
Weight	0.31kg
Min. Distance	0.1 m
Power supply	230V
IP	IP20
Glow Wire Test	960°
Source lifetime	50000 hrs
CRI	92
Lumen	528 Lm
Efficacy	42 Lm/W
UGR	13

	WARM WHITE 2700K / CRI 92+		NEUTRAL WHITE 4000K / CRI 82+	
	MEDIUM 20°	FLOOD 50°	MEDIUM 20°	FLOOD 50°
alu	11450405	11450605	11450805	11451005
black	11450402	11450602	11450802	11451002
gold	11450446	11450646	11450846	11451046
white struc	11450409	11450609	11450809	11451009

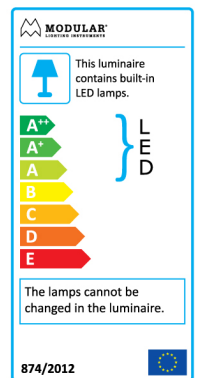

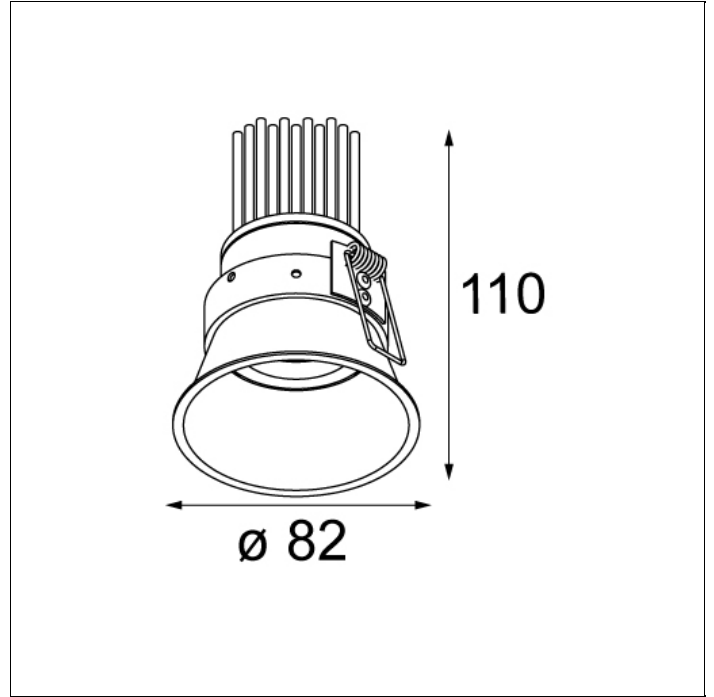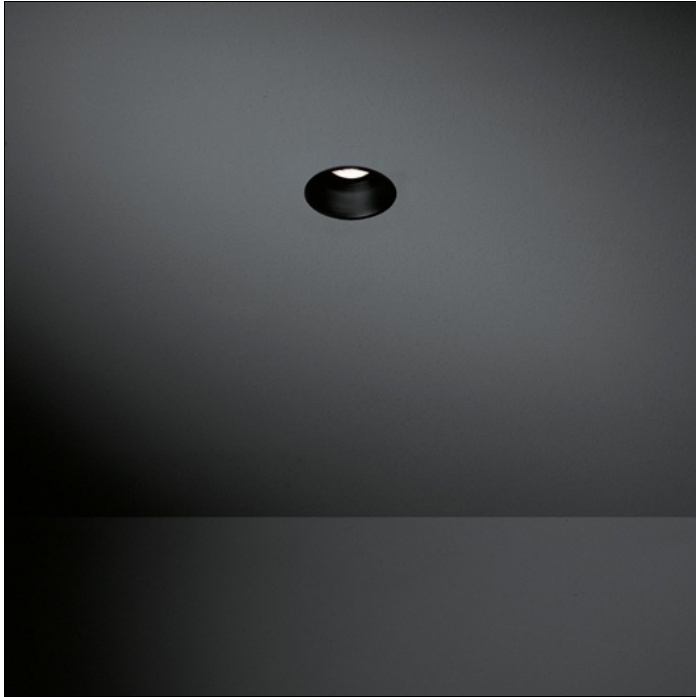

LOTIS 82 LED GE


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.

Art. Nr. 11458005



SPECIFICATIONS

Lamp	1x LED Array 10.5W
Gear / Transfo	LED gear not incl.
Cut-out size	ø 76 h 115
Weight	0.31kg
Min. Distance	0.1 m
Power supply	500mA/ 21V DC
IP	IP20
Glow Wire Test	960°
Source lifetime	50000 hrs
CRI	92
Lumen	528 Lm
Efficacy	50 Lm/W
UGR	13

	WARM WHITE 2700K / CRI 92+		NEUTRAL WHITE 4000K / CRI 82+	
	FLOOD 50°	MEDIUM 20°	FLOOD 50°	MEDIUM 20°
alu	11457905	11458005	11458105	11458205
black	11457902	11458002	11458102	11458202
gold	11457946	11458046	11458146	11458246
white struc	11457909	11458009	11458109	11458209

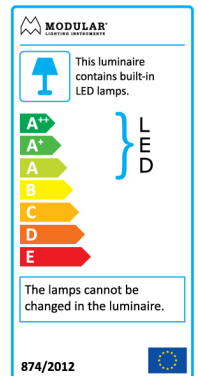

Modular reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com.

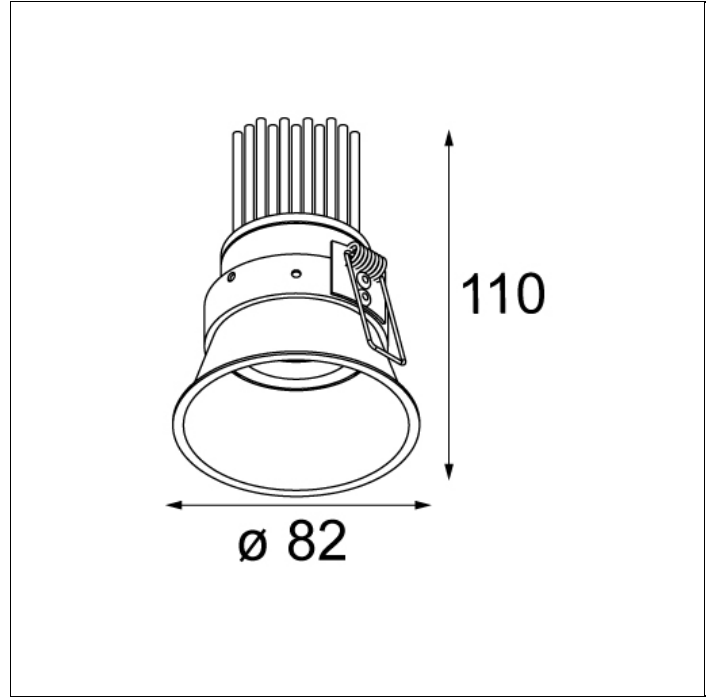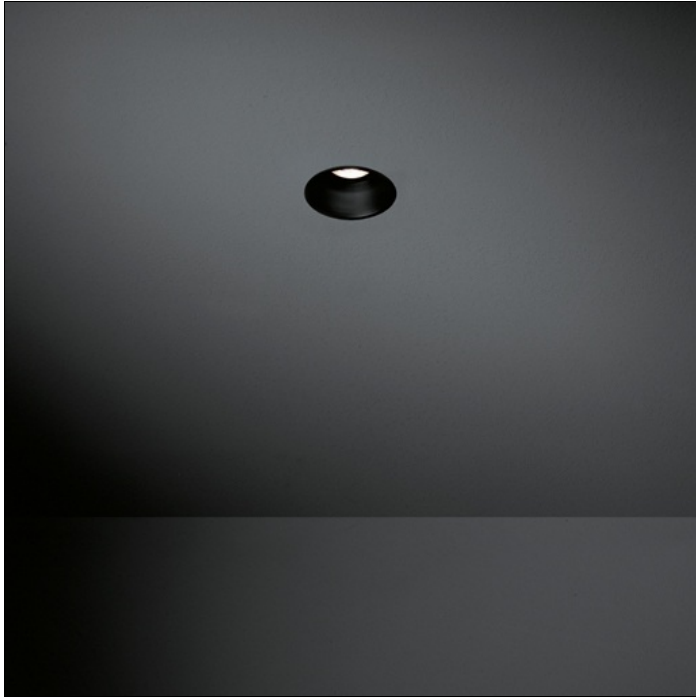

LOTIS 82 LED RG


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.



Art. Nr. 11450505

SPECIFICATIONS

Lamp	1x LED Array 10.5W
Gear / Transfo	LED gear incl.
Cut-out size	ø 76 h 115
Weight	0.31kg
Min. Distance	0.1 m
Power supply	230V
IP	IP20
Glow Wire Test	960°
Source lifetime	50000 hrs
CRI	92
Lumen	528 Lm
Efficacy	42 Lm/W
UGR	13

	WARM WHITE 2700K / CRI 92+		NEUTRAL WHITE 4000K / CRI 82+	
	MEDIUM 20°	FLOOD 50°	MEDIUM 20°	FLOOD 50°
alu	11450505	11450705	11450905	11451105
black	11450502	11450702	11450902	11451102
gold	11450546	11450746	11450946	11451146
white struc	11450509	11450709	11450909	11451109

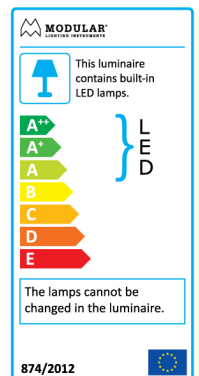

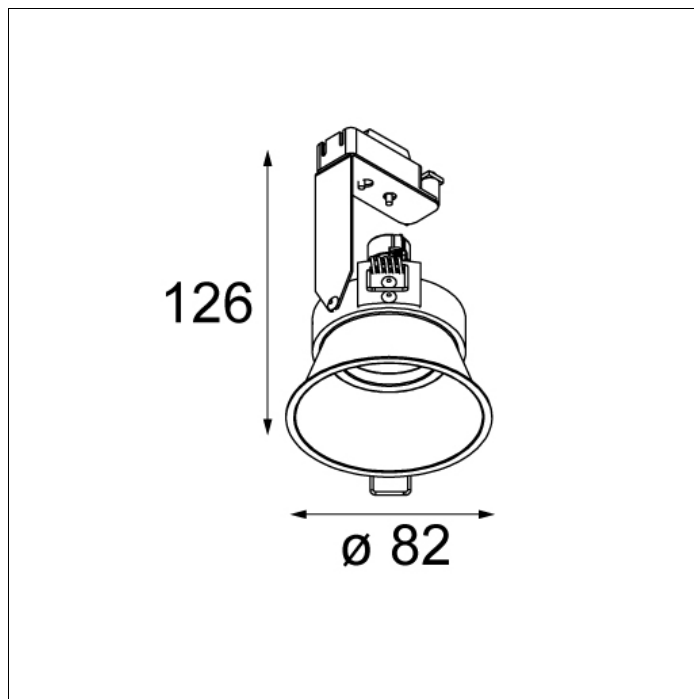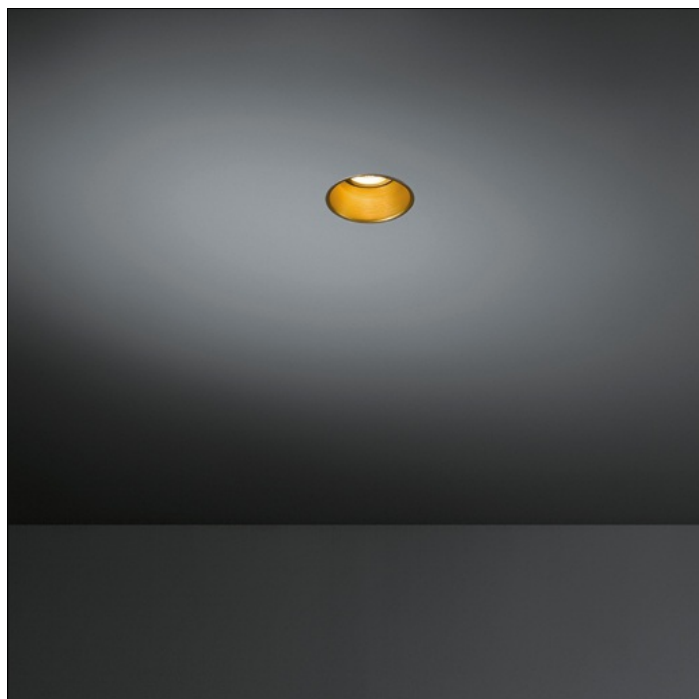

LOTIS 82 MR16 GE


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.


Art. Nr. 10880105

SPECIFICATIONS

Lamp	1x QR-CBC 54 Gx5.3 max. 50W
Gear / Transfo	transfo not incl.
Cut-out size	ø 76 h 130
Weight	0.1kg
Min. Distance	0.5 m
Power supply	12V
IP	IP20
Glow Wire Test	960°
CRI	100
Lumen	642 Lm
Efficacy	14 Lm/W
UGR	10

alu	10880105
black	10880102
gold	10880146
white struc	10880109

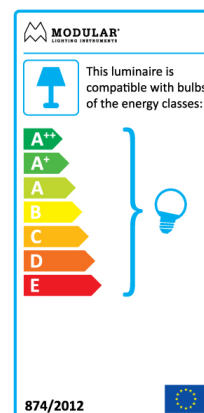

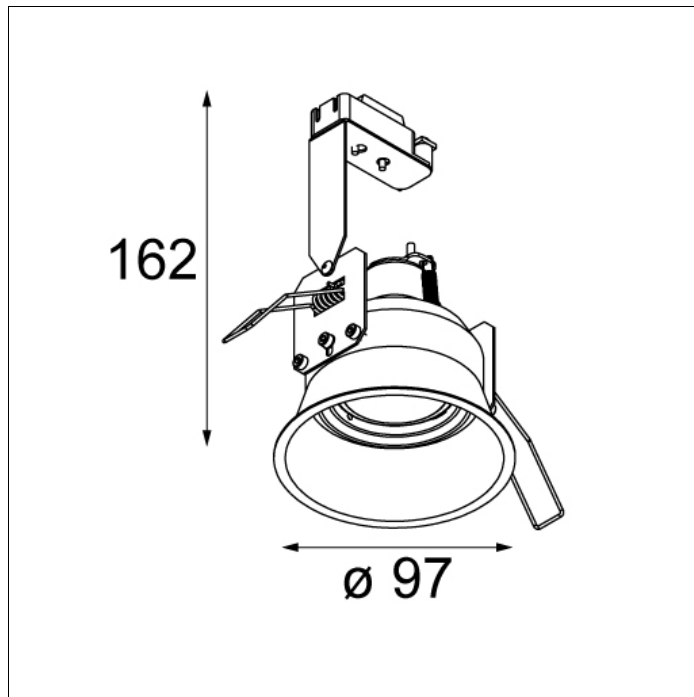

LOTIS 97 ADJUSTABLE GU10


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.


Art. Nr. 10881302

SPECIFICATIONS

Lamp	1x QPAR 16 Gu10 max. 50W
Gear / Transfo	transfo/gear not required
Cut-out size	ø 92 h 140
Weight	0.4kg
Min. Distance	0.5 m
Power supply	230V
IP	IP20
Glow Wire Test	960°
CRI	100
Lumen	360 Lm
Efficacy	7 Lm/W
UGR	11

alu	10881305
black	10881302
white struc	10881309

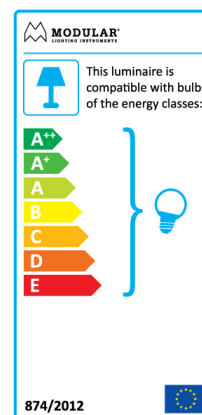

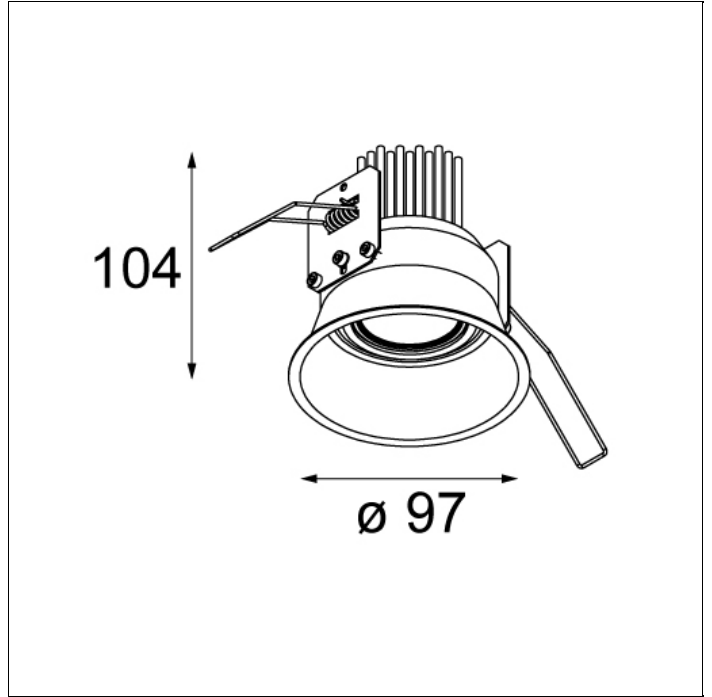

LOTIS 97 ADJUSTABLE LED GE


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.


Art. Nr. 11457202

SPECIFICATIONS

Lamp	1x LED Array	
Gear / Transfo	LED gear not incl.	
Cut-out size	ø 92 h 110	
Weight	0.77kg	
Min. Distance	0.1 m	
IP	IP20	
Glow Wire Test	960°	
Source lifetime	50000 hrs	
CRI	92	
Power supply	500mA	350mA
	21Vf	20Vf
Connected load	10.5W	6.9W
Lumen	677lm	492lm
Efficacy	65lm/W	71lm/W
UGR	16	15

	WARM WHITE 2700K / CRI 92+		NEUTRAL WHITE 4000K / CRI 82+	
	FLOOD 50°	MEDIUM 20°	FLOOD 50°	MEDIUM 20°
alu	11457105	11457205	11457305	11457405
black	11457102	11457202	11457302	11457402
white struc	11457109	11457209	11457309	11457409



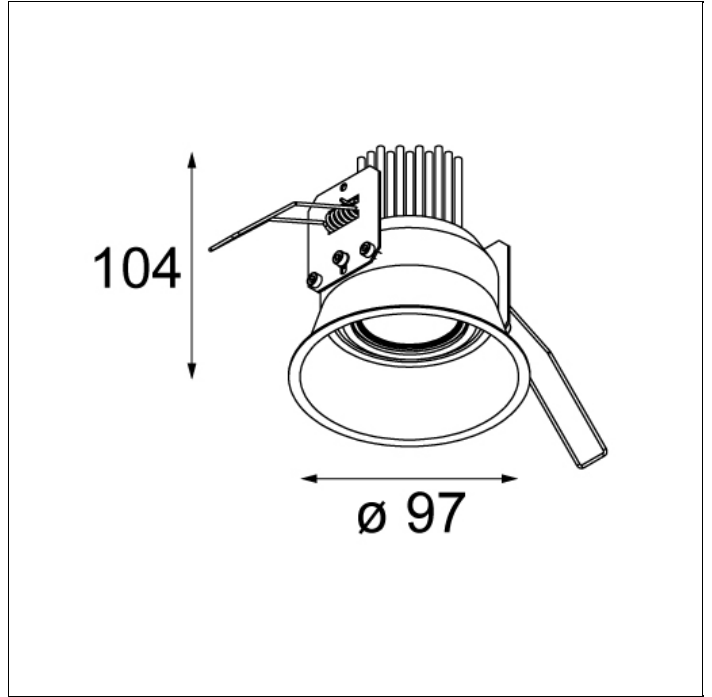

LOTIS 97 ADJUSTABLE LED RG


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.


Art. Nr. 11451302

SPECIFICATIONS

Lamp	1x LED Array 10.5W
Gear / Transfo	LED gear incl.
Cut-out size	ø 92 h 110
Weight	0.77kg
Min. Distance	0.1 m
Power supply	230V
IP	IP20
Glow Wire Test	960°
Source lifetime	50000 hrs
CRI	92
Lumen	677 Lm
Efficacy	54 Lm/W
UGR	16

	WARM WHITE 2700K / CRI 92+		NEUTRAL WHITE 4000K / CRI 82+	
	MEDIUM 20°	FLOOD 50°	MEDIUM 20°	FLOOD 50°
alu	11451305	11451505	11451705	11451905
black	11451302	11451502	11451702	11451902
white struc	11451309	11451509	11451709	11451909

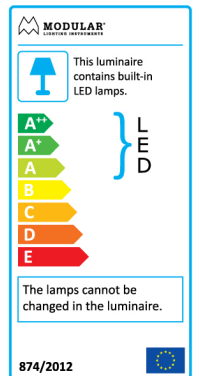

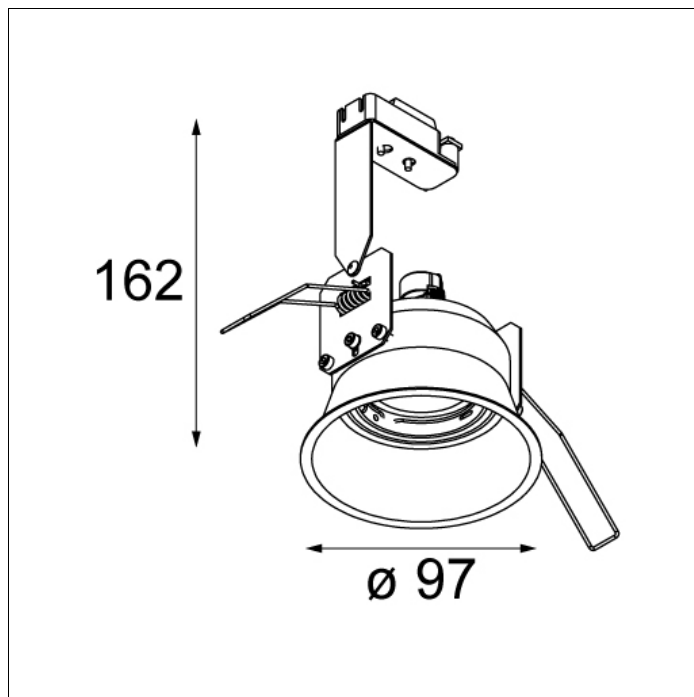

LOTIS 97 ADJUSTABLE MR16 GE


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.


Art. Nr. 10881202

SPECIFICATIONS

Lamp	1x QR-CBC 51 Gx5.3 max. 50W
Gear / Transfo	transfo not incl.
Cut-out size	ø 92 h 165
Weight	0.4kg
Min. Distance	0.5 m
Power supply	12V
IP	IP20
Glow Wire Test	960°
CRI	100
Lumen	732 Lm
Efficacy	16 Lm/W
UGR	12

alu	10881205
black	10881202
white struc	10881209

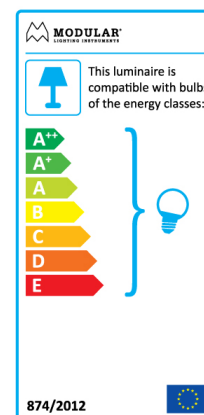

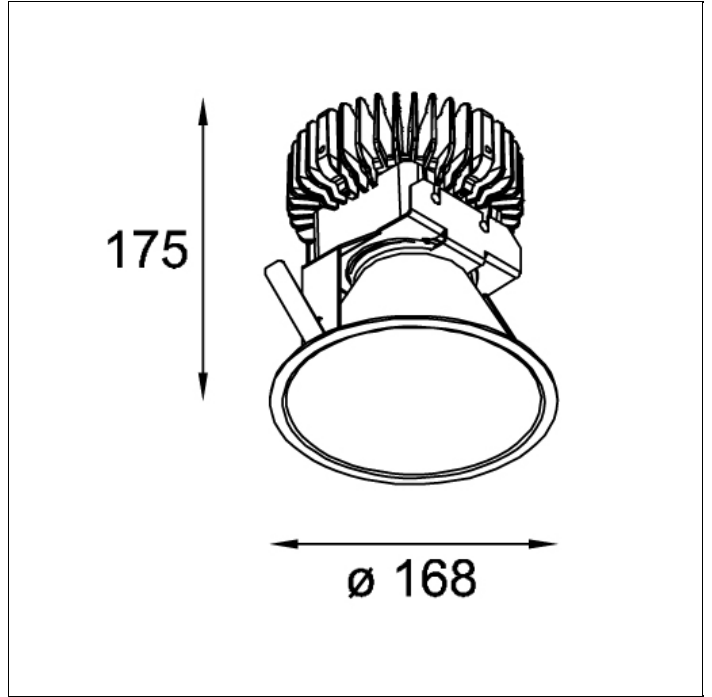

LOTIS 168 IP44 LED 1100LM RG


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.

Art. Nr. 11455202

SPECIFICATIONS


Lamp	1x LED Module 11W
Gear / Transfo	LED gear incl.
Cut-out size	ø 160 h 180
Weight	1.5kg
Min. Distance	0.1 m
Power supply	230V
IP	IP44
Glow Wire Test	960°
Source lifetime	50000 hrs
CRI	80
Lumen	492 Lm
Efficacy	34 Lm/W
UGR	13

	WARM WHITE 3000K / CRI 80+	NEUTRAL WHITE 4000K / CRI 80+
	WIDE FLOOD 70°	WIDE FLOOD 70°
black	11455202	11455402
gold	11455246	11455446
white struc	11455209	11455409

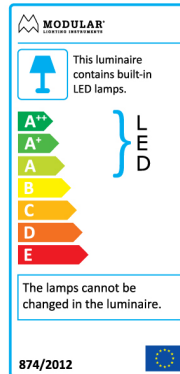

This label is available in other languages:
<http://supermodular.com/assets/TYPE2.pdf>



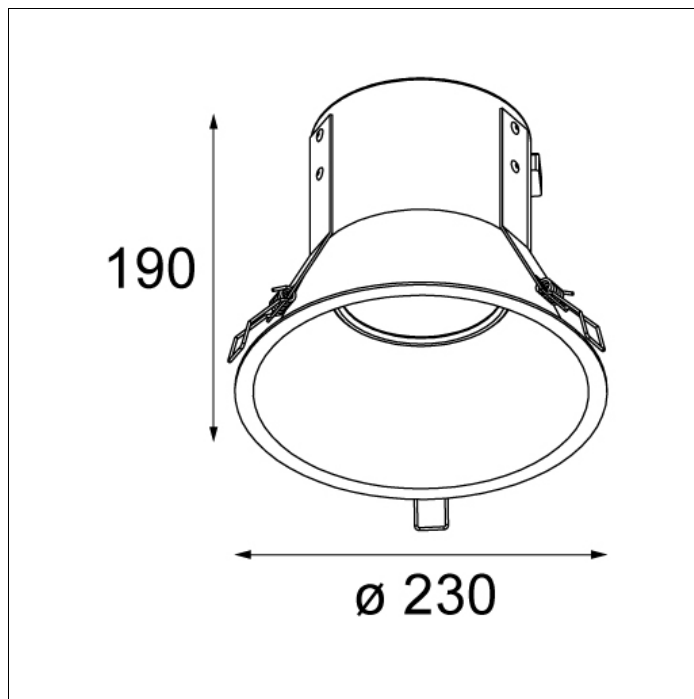


LOTIS 230 CDM-TC GE

Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.

Art. Nr. 10881802


SPECIFICATIONS


Lamp	1x HIT-TC -CE G8.5 max.70W
Gear / Transfo	gear not incl.
Cut-out size	ø 210 h 220
Weight	0.85kg
Min. Distance	0.5 m
Power supply	4-5kV
IP	IP20
Glow Wire Test	960°
CRI	83
Lumen	3704 Lm
Efficacy	53 Lm/W
UGR	19
Remark	! always use with optional reflector



This label is available in other languages:
<http://supermodular.com/assets/TYPE4.pdf>

alu	10881805
black	10881802
white struc	10881809



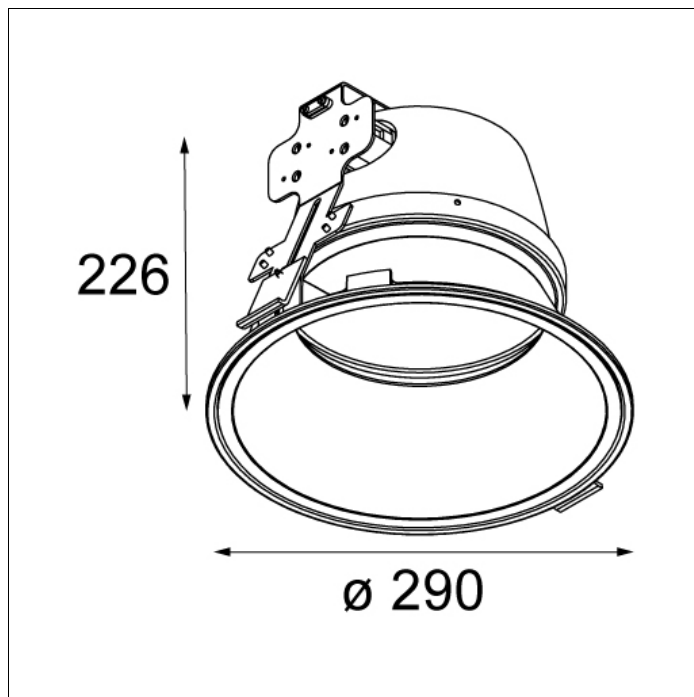

LOTIS 290 TC-D 26/32W


Lotis is the spotlight which started it all. The hallmark of this fitting, which is available in sizes from small to large and for indoor or outdoor use, is the deeply recessed bowl which holds the light source and has a fine edge. Choose white, black, aluminium or gold for different lighting effects. As well as a recessed version, we also offer Lotis tubed, a cylinder which allows you to play with colour contrasts between the interior and the exterior. If you prefer an angular look, simply choose Lotis Square.

Art. Nr. 10881602

SPECIFICATIONS

Lamp	2x TC-TEL Gx24q-3 26/32W
Gear / Transfo	gear incl., electronic
Cut-out size	ø 280 h 235
Weight	1.8kg
Min. Distance	0.5 m
Power supply	230V
IP	IP20
Glow Wire Test	960°
CRI	82
Lumen	1272/1696 Lm
Efficacy	23/25 Lm/W
UGR	19/20

alu	10881605
black	10881602
white struc	10881609

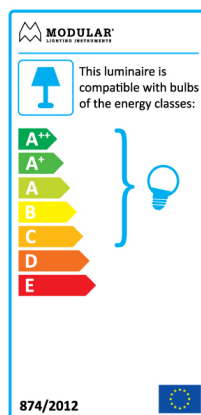

This label is available in other languages:
<http://supermodular.com/assets/TYPE4.pdf>

